

Soundac® Acoustic Doors

Doors are usually a weak spot in a construction. Soundac® Acoustic Doors solve this problem for you.

Soundac® Acoustic Doors are very well suited for rooms where a high sound insulation is required. The doors are used in e.g. boiler rooms, machine rooms, compressors, cafés, bars, laboratories and music rooms.

Depending on the required sound insulation the doors can vary in thicknesses from 50 up to 150 mm. The doors can be constructed as single or double hinged doors and fitted with a single or double rubber seal.




Properties

- Good sound insulation
- Variable thickness 50 - 150 mm
- Custom build
- Optional in RAL coating

Sound insulation (dB)

100 mm door

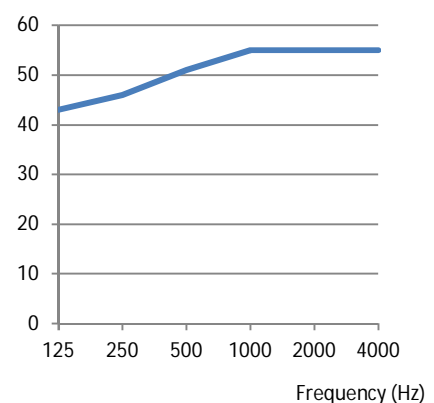

Despite the careful composition of this datasheet no rights can be derived from this. Changes are reserved.